



DS311 Rock support bolter

Technical Specification

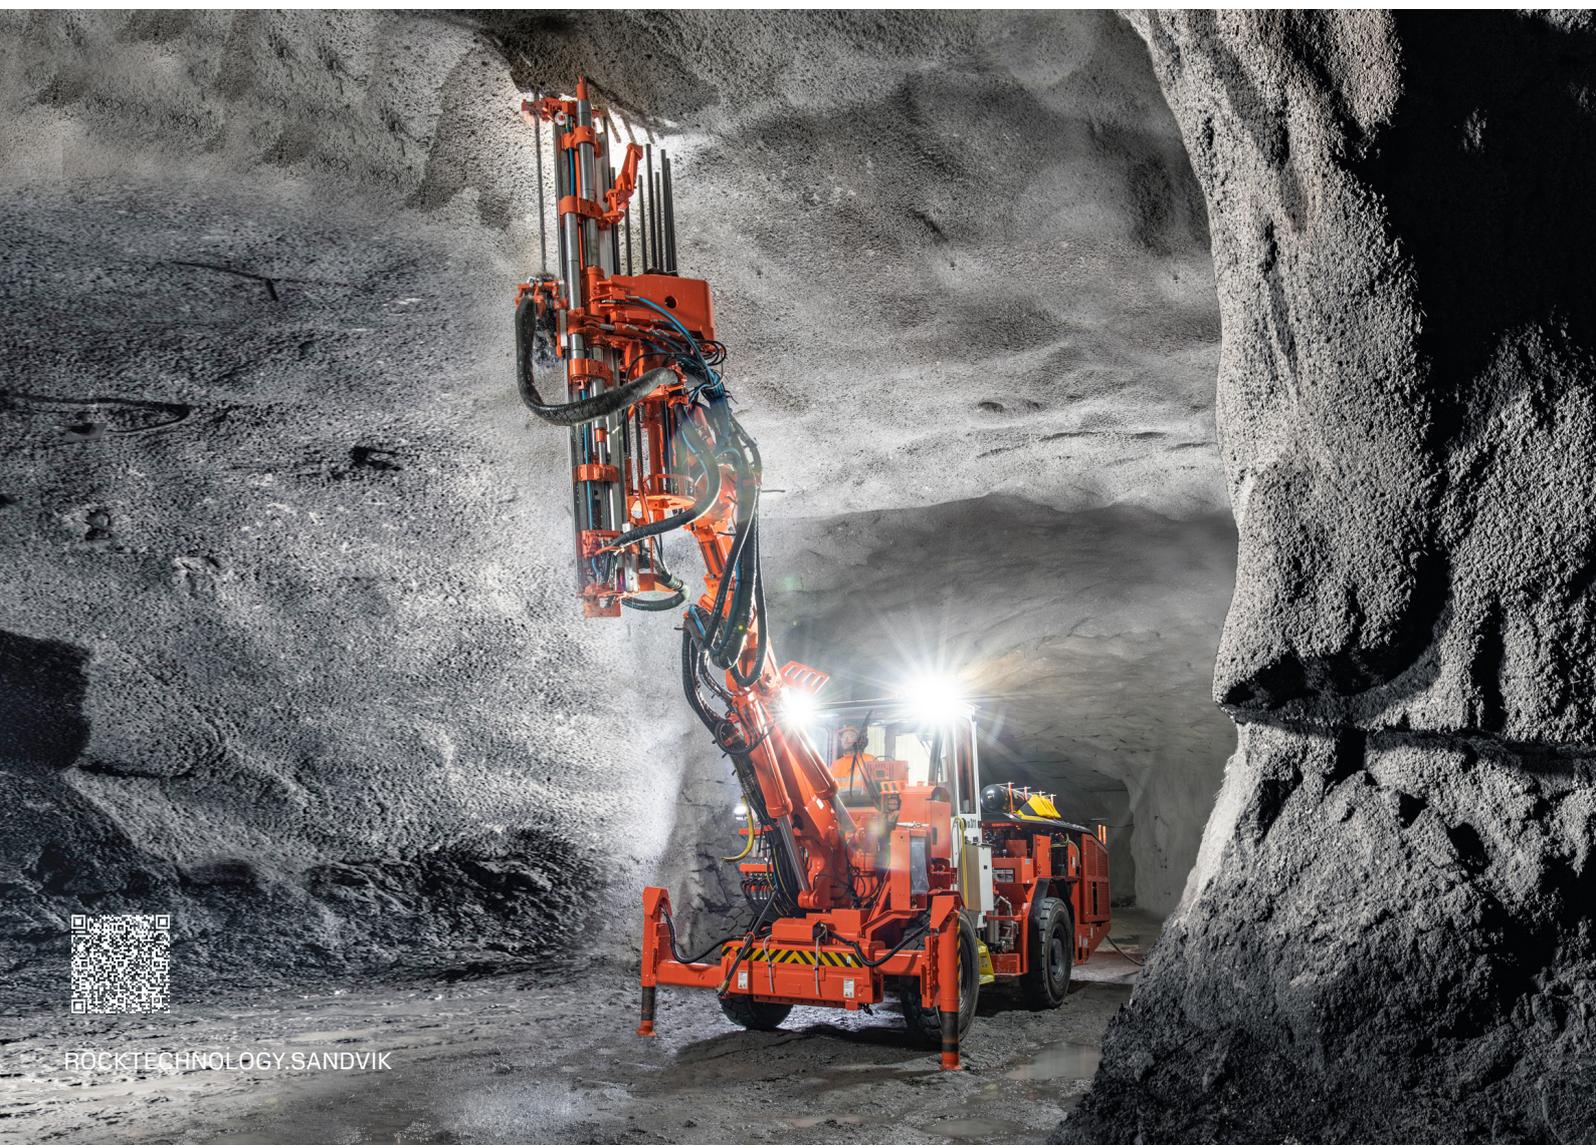

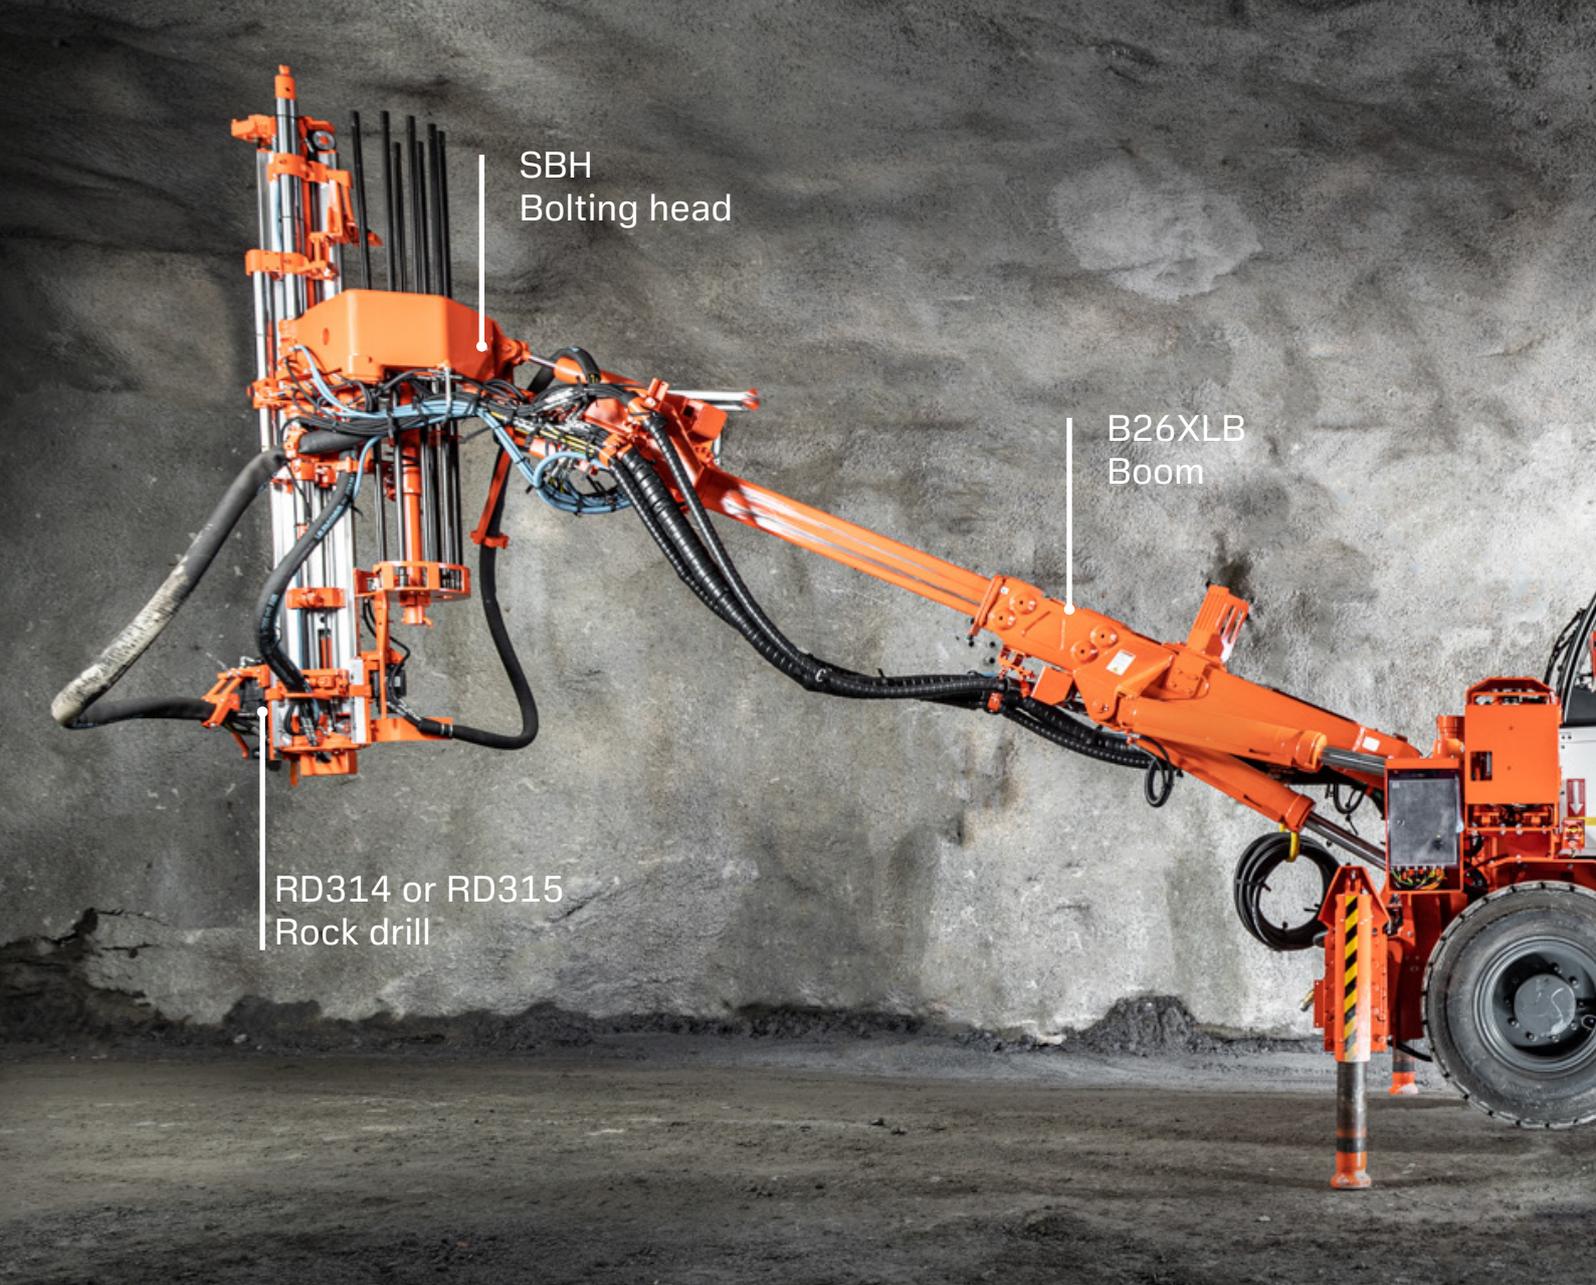

Productivity and versatility in mechanized bolting

Key features

Coverage	6 350 x 2 100 mm (roof)
Drift size class (H x W)	3 000 mm x 3 000 mm
Hydraulic rock drill	RD314 (14 kW) RD315 (15 kW)
Drill feed	SBH, 5 to 10 ft
Boom	B26XLB
Hole length	3 440 mm (12' rods)
T-section width in turning	4 165 mm (with SBH5 and B26B)
Transport width	2 020 mm
Transport height (canopy)	2 140 mm / 3 100 mm
Transport height (cabin)	2 920 mm or 2 670 mm
Transport length	11 530 mm (with SBH5)
Total weight	15 000 - 18 000 kg depending on options

Sandvik DS311 is the most compact mechanized rock bolter on the market. Its unique rock bolting concept delivers the best ratio of rock bolt length to drift height.

Sandvik DS311 is a single operator electro-hydraulic rock bolter for rock reinforcement in underground mines with small and medium cross sections. The operator works below supported ground while protected under a FOPS / ROPS certified cabin structure. Mechanization of the bolting process ensures efficient, constant and durable rock bolt integrity.

Built from proven and reliable components, Sandvik DS311 uses RD314 or RD315 rock drill for fast performance, installed on the Sandvik Bolting Head with low operating cost.

Versatility is also one of the rock bolter's key characteristics. Sandvik DS311 can install most common rock bolts ranging in length from 1.5 to 3 meters (5 to 10 feet).



FOPS / ROPS
Ergonomic cabin

Same carrier
through the range


Sandvik DS311DE shown

Main benefits

Highly versatile bolter


DS311 bolter comes in three versions: DS311 (diesel tramming and electric drilling), DS311D (diesel engine for tramming and drilling for areas without electrical power) and DS311DE (diesel tramming and electric or diesel drilling).

Engineered with modern, simple and reliable technologies, Sandvik DS311 ensures maximum safety and consistency in the bolting process.



Higher productivity

Up to 35%* more productive than market standards



Improved safety

100%* safer than manual bolting



Extended performance

Up to 7.7m height mechanized bolting




Optimized working environment

Modern and ergonomic cabin for maximum operator comfort with improved visibility and reduced noise level




Indicator lights for inhibition swiches status

This option provide a clear visual indication if the boom movements have been isolated. People in the area can easily visualize if it is authorized to enter in the boom area for a short period of time.

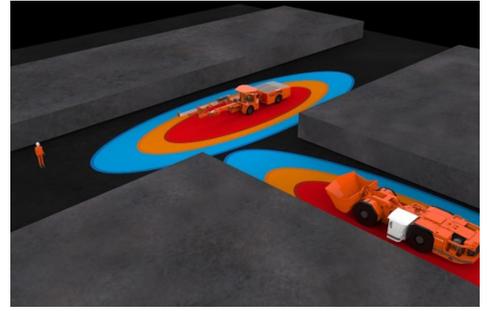

Proximity detection system (PDS level 9)

PDS system is generally designed to inform the operator and to slow down the machine and/or stop the equipment in case of a collision risk with a person or vehicle carrying a tag.

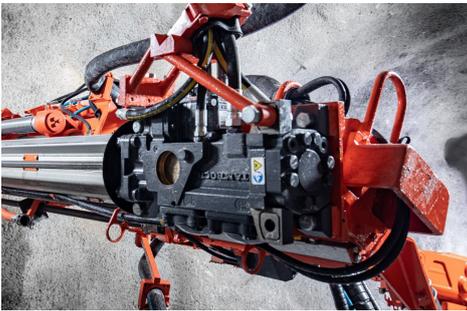

High frequency rock drill

Sandvik RD314 is a compact, robust and universal hydraulic percussive rock drill. It is known for its hydraulic efficiency and high penetration rate.



Multipurpose bolting head

The SBH bolting head is suitable for bolts from 5' (1 525 mm) to 10' (3 050 mm) and can operate in a gallery as low as 2.9 m height.



Efficient control system

The THC561 drilling control system increases drilling performance and reduces the wear on both rock drill and rock tools for an extended lifetime.



Sandvik 365 Parts and Services

Proudly keeping you on track!

Sandvik 365 Parts & Services offer a variety of possibilities to enhance your Sandvik DS311 bolter's performance.

As an OEM, we provide the best-suited choices to preserve your machine's high performance throughout its lifetime.

These consist of highly skilled service specialists supporting you 365 days a year, all using Sandvik Genuine parts and components complemented by a range of robust tools.

In addition, you get to enjoy the benefits of advanced digital services and a global infrastructure dedicated to keeping your Sandvik fleet on track.

Technical Specification

Hydraulic rock drill

Type of rock drill	RD314 (TS2-137) Standard	RD315 (TS2-505) Optional
Percussion power	14 kW	15 kW
Percussion pressure	Max. 180 bar	Max. 180 bar
Percussion rate	110 Hz	95 Hz
Rotation speed	Max. 530 rpm (100 cc)	Max. 530 rpm (100 cc)
Rotation torque	Max. 500 Nm (160 cc)	Max. 500 Nm (160 cc)
Hole size	33 - 43 mm (1 ⁹ / ₆₄ - 1 ¹¹ / ₁₆)	33 - 43 mm (1 ⁹ / ₆₄ - 1 ¹¹ / ₁₆)
Recommended rod	R32 - HEX25 - R25	R32 - HEX25 - R25
Shank adapter	R32 female	R32 female
Weight	115 kg	126 kg
Filling device for accumulators	Specification TS2-430	Specification TS2-430

Bolting head

Type of bolting head (TS2-208)	SBH5	SBH6	SBH7	SBH8	SBH10
Bolt length	mm 1 525	1 830	2 135	2 440	3 050
Drill steel length	mm 1 975	2 175	2 475	2 795	3 405
Hole depth	mm 1 755	1 950	2 250	2 570	3 185
Total length (A) (drilling)	mm 2 520	2 820	3 120	3 440	4 090
Total length (B) with RHR50 (bolting)	mm 2 710	3 010	3 310	3 630	4 280
Total length (B) with RD315 (bolting)	mm 2 770	3 070	3 370	3 690	4 340
Recommended operating height with RD315 (min.)	mm 2 970	3 270	3 570	3 890	4 540
Total weight*	kg 1 305	1 335	1 365	1 405	1 445

Dimensions +/- 5 mm

*The weights are theoretical and given for information
Dimensions and weights are for a bolting head equipped

Boom

Type of boom	B26XLB (TS2-207) Standard	B26B (TS2-206) Optional
Boom extension	1 700 mm	1 200 mm
Roll-over angle	360°	360°
Boom weight, net	1 500 kg	1 350 kg

Hydraulic system

Powerpack	HPP355 (1 x 55 kW) IE3 electric motor
Filtration size (pressure / return)	20 μ / 10 μ Quick couplers for kidney filtration
Oil tank volume	180 liters
Filling pump for hydraulic oil	Electric
Cooler for hydraulic oil	OW30 oil-to-water (1 x 30 kW)

Drilling control system

Type of control system	THC561 (TS2-362)
Operating principle	Hydraulic control
Manual boom control	Direct control Fully proportional Hydraulic parallelism
Drilling control	Manual collaring Feed / percussion pressure control Feed / percussion pressure monitoring Anti-jamming system Flushing control (On /Off/Auto.)
Drilling safety	Boom movements inhibition switches

Electric system

Standard voltage	380 – 690 V (±10%)
Total installed power	70 kW
Main switch gear	MSE 5
IP classification	Specification TS2-132
Starting method	Star Delta 380 V - 575 V DOL 600 -690 V
Automatic cable reel	TCR1
Cable reel controls	At operator station and remote control at rear of the machine
Sealed AGM batteries	2 x 12 V, 95 Ah
Cable plug holder	On central rear hood
Front working lights (combined working and driving)	4 x 50 W LED (4 200 lm, 6 000 K)
Rear working lights (combined working and driving)	4 x 50 W LED (4 200 lm, 6 000 K)
Search light	Remoted with cabin: 1 x 40W LED (2 300 lm, 5 700 K) Manual with canopy: 1 x 17W LED (600 lm, 6 000K)
Rear brake / parking lights	2 x Red LED

Air and water flushing

Flushing of holes	By Water
Water booster pump type	WBP1 (4 kW)
Water pump capacity	33 l/min at 15 bar (input pressure = 4 bar)
Water pump inlet pressure	2 bar (min.)
Flushing water pressure	10 - 15 bar
Shank lubrication device	SLU1 (air / oil mist)
Air compressor	1 m ³ /min at 7 bar
Oil consumption	100 g/h
Air consumption	250 l/min

Operator's safety cabin

Cabin certification	FOPS / ROPS (ISO 3449 / 3471) Cabin with safety grill, height 2 920 mm
Operation	Standing drilling, seated tramming
Sound pressure level according to EN 16228	Operator station: 80 dB(A)
Operator's seat	Ergonomic T-back seat
Air conditioning	Cooling only
Tramming cameras	1 x rear frame 2 x on each side of cabin or canopy

Technical Specification

Carrier

Type of carrier	NC5-17
Steering system	Frame steering
Carrier articulation	Up to ± 38°
Rear axle oscillation	± 10°
Ground clearance	320 mm
Diesel engine	Deutz TCD2012, 74 kW, Tier 3, Stage IIIA, Canmet, China 2
Exhaust catalyzer	Standard
Transmission	Hydrostatic, automotive
Axles	Dana spicer 112 with extended differential breathers
Tires	12.00-20
Service brakes	Hydrostatic and positive braking
Parking and emergency brakes	SAHR fail safe type wet disc brakes
Tramming speed	12 km/h (horizontal) 5 km/h (14%=1:7=8°)
Gradeability / sideways tilt	Max. 15° / 5° (according to ISO 18758)
Fuel tank	90 liters
Tramming oil tank	55 liters
Carrier stabilization	2 x Telescopic (front) 2 x Vertical (rear)
Bolt storage	Left side
Tramming alarm	Backward alarm
Knowledge Box™	Connectivity solution (TS2-535) My Sandvik insight readiness (TS2-390)
Documentation	1 x Operator's manual 1 x Maintenance manual 1 x Technical manual (in English only) 1 x Parts manual (in English only) 2 x USB key of manuals (PDF files) 1 x Online Parts manuals (MySandvik)

Optional features and packages


Rock drill	
Type of rock drill	RD315 instead of RD314 (drilling line)
*RHR40 or RHR50 rotary drill	Instead of RD314 (drilling line)
Boom	
*Type of boom	B26B instead of B26XLB
Boom suspension system	Specification TS15-232
Bolting option	
*Bolting alternatives	GCR, GCC, WI, S, MD, MDX, M SBH10 (8' and 7'), SBH8 (7' and 6'), SBH7 (6'), SBH6 (5')
2 or 3 bolt lengths carousel	On the bolting head (TS2-355) with hooks for mesh on carrier side
Screen handler	For GCR and GCC system (TS2-291)
Bolting head oiler	For manual extension drilling with optional rod handler
Rod retainer on SBH	
Hydraulic system	
*Biodegradable oils	PLANTOHYD SE 68 or PLANTOHYD SE 46 (arctic)
Drilling control system	
Indicator lights	For boom movement prevention switch
Access detector system	Mandatory in Europe (TS2-211)
Access protector system	Mandatory in Canada (TS2-211)
Electric system	
*Multivoltage pro	380 - 1000 V, at 50 or 60Hz
*Starting method	Star Delta 600 - 690 V
*Electric cables	Specification TS2-121
Ground fault and overcurrent protection	VYK (N/A USC package) with pilot cord (optional)
Auxiliary outlet	1 x 110 V or 1 x 230 V, 16 A
Battery jump start	Optional
Dewatering pump outlet readiness	8 kW (site voltage 380 - 690 V) N/A USC package
Amber flashing light	LED (24 V)

Optional features and packages

Air and water system	
Air mist flushing kit	Specification TS2-285
*Air compressor	2.8 m³/min at 7 bar
Water hose reel with water hose	THR with Ø32 mm (1 ¼"), 80 meters
Water hose with hooks	Ø32 mm (1¼"), 80 meters
Cleaning system	
HP system with reel	Up to 180 bar (TS2-343)
Greasing systems	
Centralized greasing points	Specification TS2-463
Manual system	Greasing gun and cartridge with hose reel (TS2-463) Carrier (TS2-463)
Automatic system	
Operator's safety cabin / canopy	
*Safety canopy	FOPS (ISO 3449)
*Low cabin with safety grill	FOPS / ROPS certification Height 2 670 mm, During drilling and tramming
Cabin heating	Radio / USB MP3 / Bluetooth® and loudspeakers
Cabin audio system	Brake applied or buzzer For canopy
Seat belt and door interlock	
Safety grill	
Fire suppression system	
Hand held fire extinguisher	1 or 2 x 6 kg or 7.7 kg (Type ABC)
Manual or automatic system	6 nozzles, Ansul (TS2-460)
Auto. fire suppression system	Sandvik Eclipse™ (TS2-461)
Carrier	
*Diesel engine	TCD3.6, 74 kW, Tier4F, Stage IV, Canmet TCD3.6, 74 kW, Stage V TCD3.6 DWG, 75 kW, China 4 with DPF
*Foam filled tires	4 pcs
Fast filling system	Wiggins (complete)
Brake release	Manual hand pump
*Knowledge Box™	My Sandvik productivity readiness (TS2-390)
Wheel chocks and holders	2 Sets
*Directional tramming alarm	Cri du Lynx®
Proximity detection system interface	CANbus level 9
Extra items	
Berg plug and socket	250 A
Spare rock drill	RD314, RD315
Tools and pressure test box	Specification TS2-429
Spare wheel assembly	12.00-20 foam filled tire
Special tools for rock drill	Field tool set (TS2-119)
Warranty extension	One year (excl. Kazakhstan)
Documentation	Extra paper or PDF manuals For CIS
Video recorder and speedometer	LAM, USC, AUS, CE package
Package: Country specific options	N/A 1 000 VAC and USC package
*Package: Extremely low ambient temperature	Specification TS2-195
*Package: Harsh water	Basic or advanced (TS2-049)
*) Replaces standard feature	


Technical drawings

All dimensions in mm

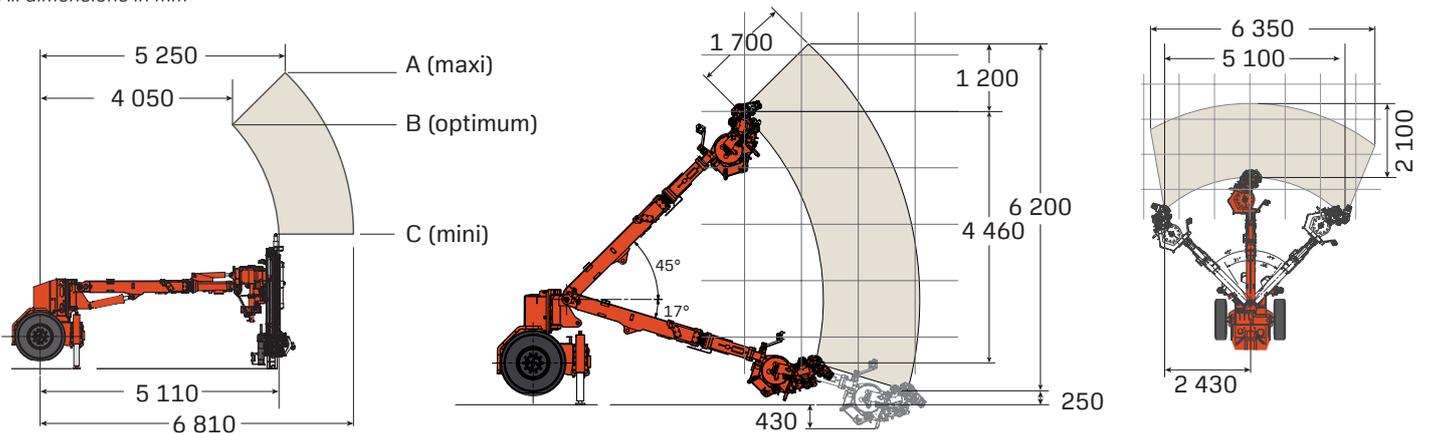


Coverage at optimum height (B)

		SBH5	SBH6	SBH7	SBH8	SBH10
DS311 B26XLB	A (Maxi)	mm 6 810	7 030	7 090	7 340	7 650
	B (Optimum)	mm 5 610	5 830	5 890	6 140	6 460
	C (Mini)	mm 2 970	3 270	3 570	3 890	4 540
	Overall length	mm 11 530	11 660	11 820	12 020	12 325

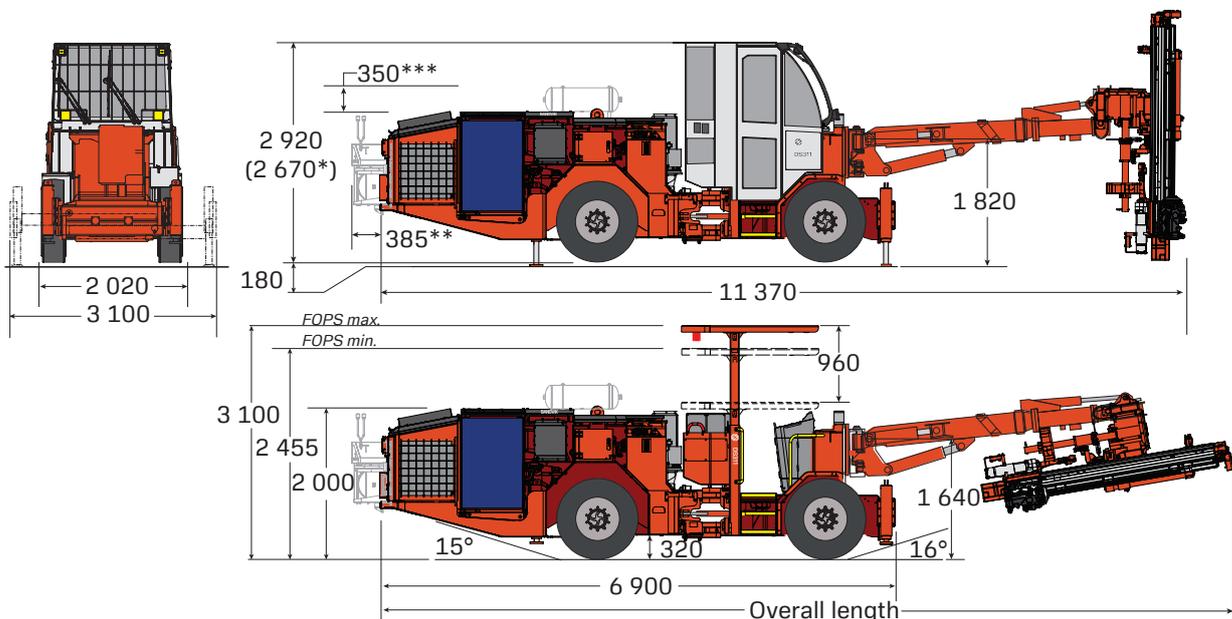

*) With low cabin option **) With Sandvik eclipse option

***) With Air receiver option

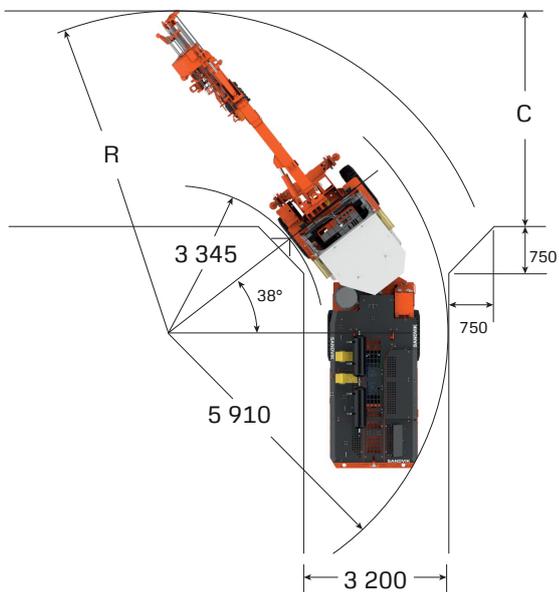

	External radius (R)	Cornering (C)
DS311 (SBH5, B26XLB)	mm 7 195	4 485
DS311 (SBH6, B26XLB)	mm 7 360	4 650
DS311 (SBH7, B26XLB)	mm 7 410	4 700
DS311 (SBH8, B26XLB)	mm 7 600	4 890
DS311 (SBH10, B26XLB)	mm 7 860	5 150
DS311 (SBH5, B26B)	mm 6 800	4 165
DS311 (SBH6, B26B)	mm 6 970	4 330
DS311 (SBH7, B26B)	mm 7 020	4 380
DS311 (SBH8, B26B)	mm 7 210	4 570
DS311 (SBH10, B26B)	mm 7 465	4 830

SANDVIK

TSS-039;23ENG@Sandvik Mining and Rock Solutions 2024. SANDVIK, iSURE® and DIGITAL DRILLER™ are trademarks owned by the Sandvik group of companies.

*Test results and calculations are to be considered as results reached under certain and controlled conditions. These test results and calculations should not be treated as specifications and Sandvik does not guarantee, warrant or represent the outcome of test results or calculations in any or all circumstances.

